



We Minimize the Energy Footprint of the Digital Economy

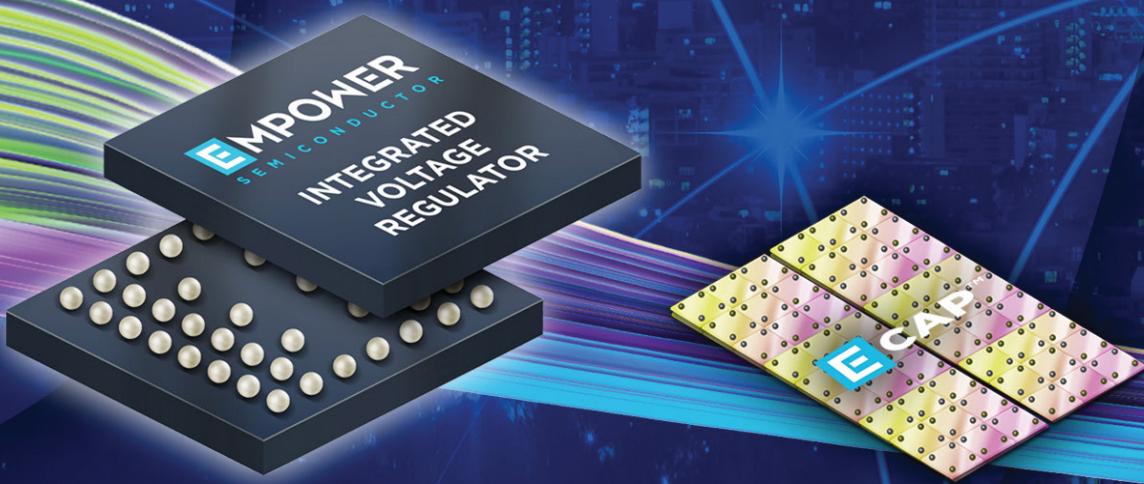


EMPOWER
SEMICONDUCTOR

Power Management Solutions for High Density Data Intensive Applications

- Industry's smallest and fastest Integrated Voltage Regulators (IVRs)
 - 3x smaller, 1,000x faster
 - Improves system's efficiency
 - Single chip dc to dc converters
 - High frequency – Zero external discrete components
- Highest density Silicon Capacitors
- World class wafer foundry, assembly and test
- Headquartered in San Jose, California
- Worldwide Sales Representatives and Distributors

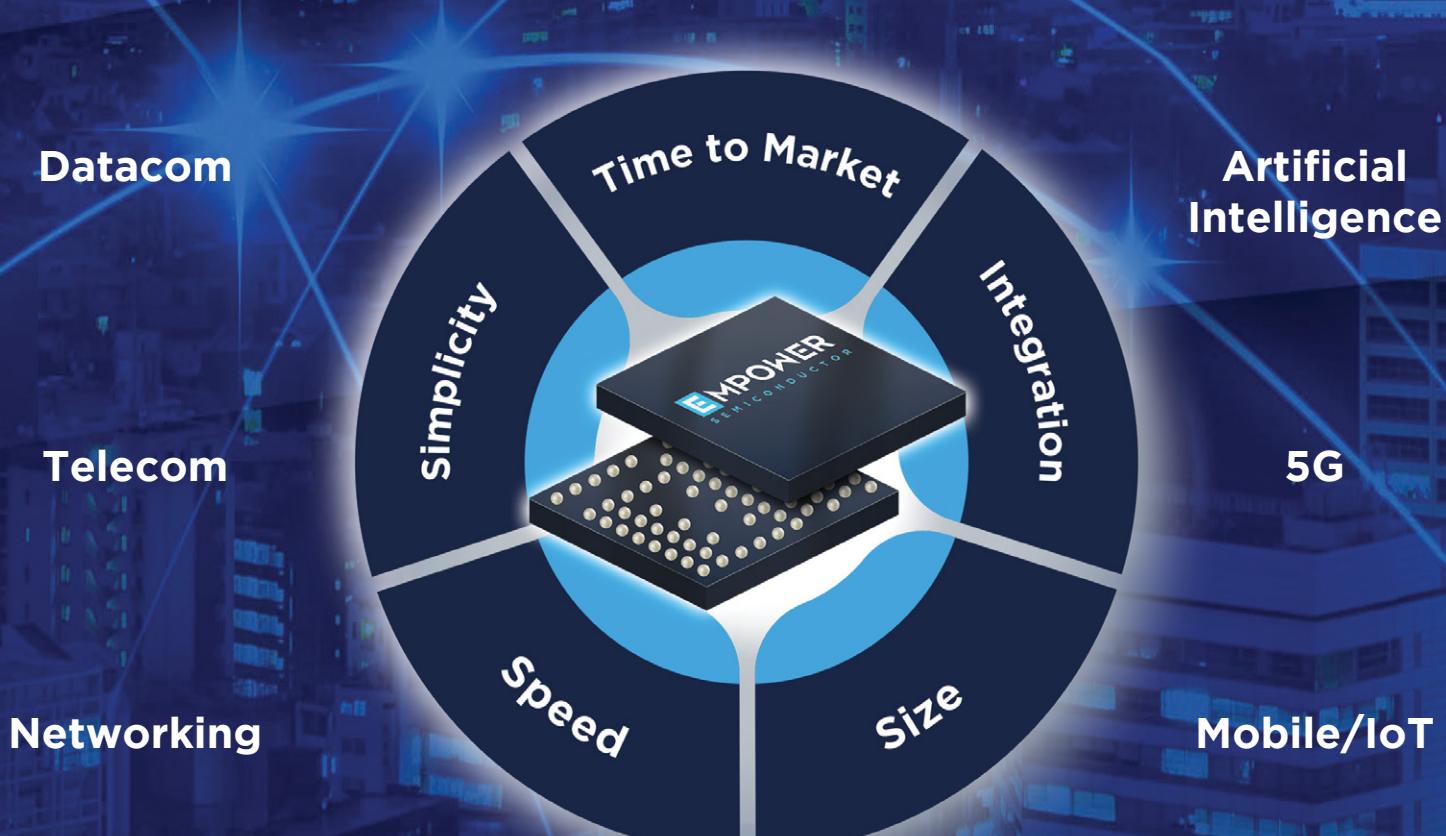

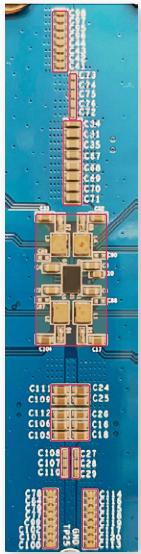

3x Size Reduction
Zero Discrete Components

Competition
335mm²
75 Components

Empowering Density

3x Smaller...


- Industry's smallest step-down regulator packs the highest power in the smallest footprint.
- High density E-CAP™ shrinks banks of high-speed decoupling MLCC capacitors.

Empowering Performance

1,000x Faster

World's fastest regulator with 15mV droop in 500ns full load step and ExpressV™ DVS up to 5mV/ns provide less commutation losses for greater system efficiency.

EP7010 - Output Voltage Transient Load Response, 0.8V Output, 1.8V Input, 100mA to 10A Load in 500ns

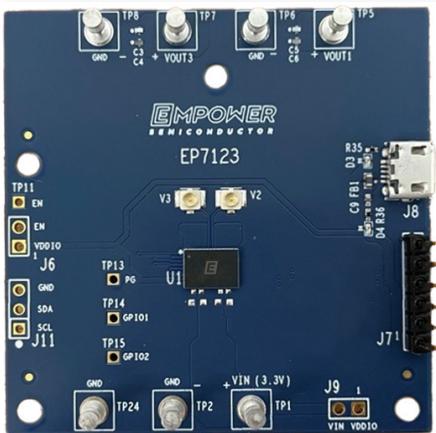

EP7123 Demo Board


Empowering Simplicity

Place One and Done!

- Single component Bill-of-Material
- I²C field re-configuration
- Fastest time to market design
- Increased reliability



Industry's Smallest and Fastest Integrated Voltage Regulator

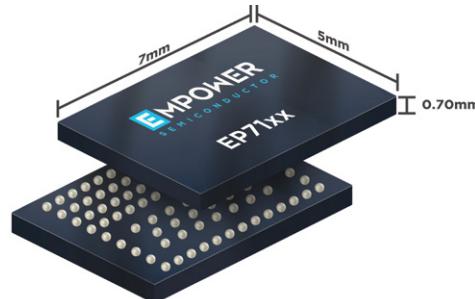

Empower's patented IVR™ technology eliminates dozens of discrete components. The result is power delivery with unprecedented simplicity, speed, accuracy, and no discrete components!

EP70xx

10A total current

1-3 outputs

1.8V_{IN} optimized

I²C interface

5x5x0.8mm package

EP71xx



12A total current

1-4 outputs

3.3V_{IN} optimized


I²C interface

5x7x0.7mm package

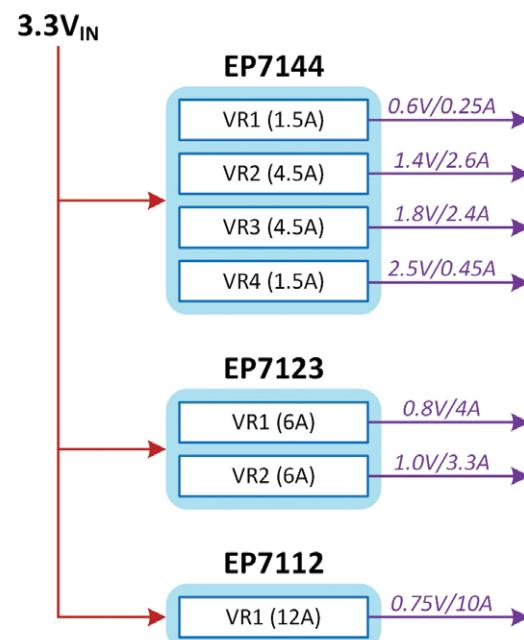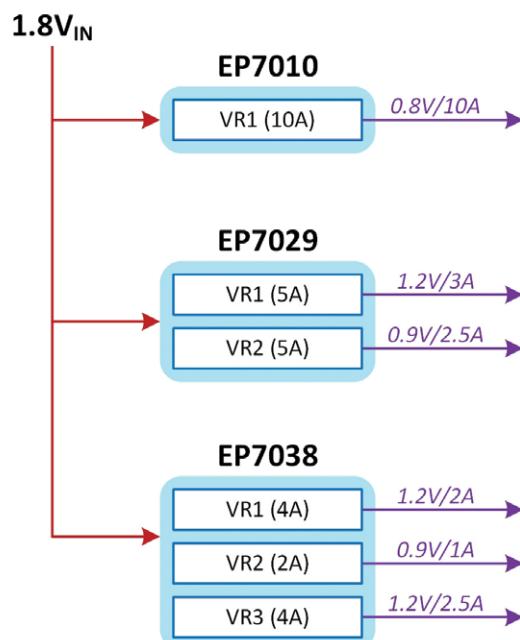





Enabling New Levels of Power and Signal Integrity!

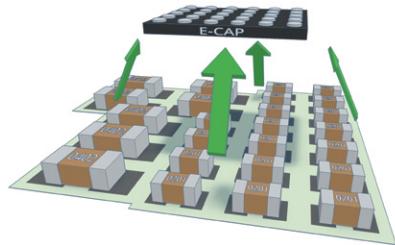

Empower's E-CAP™ is a revolutionary silicon capacitor platform enabling multi-capacitors integration in a single device for PCB and SoC in-package mounting.


- 50µm + ultra low profile
- Lowest PDN impedance
- Highest silicon capacitor density
- Superior stability
 - No DC or AC bias derating
 - No aging and temperature derating
- 15pH ultra low ESL
- No ferromagnetic material
- No audible noise susceptibility

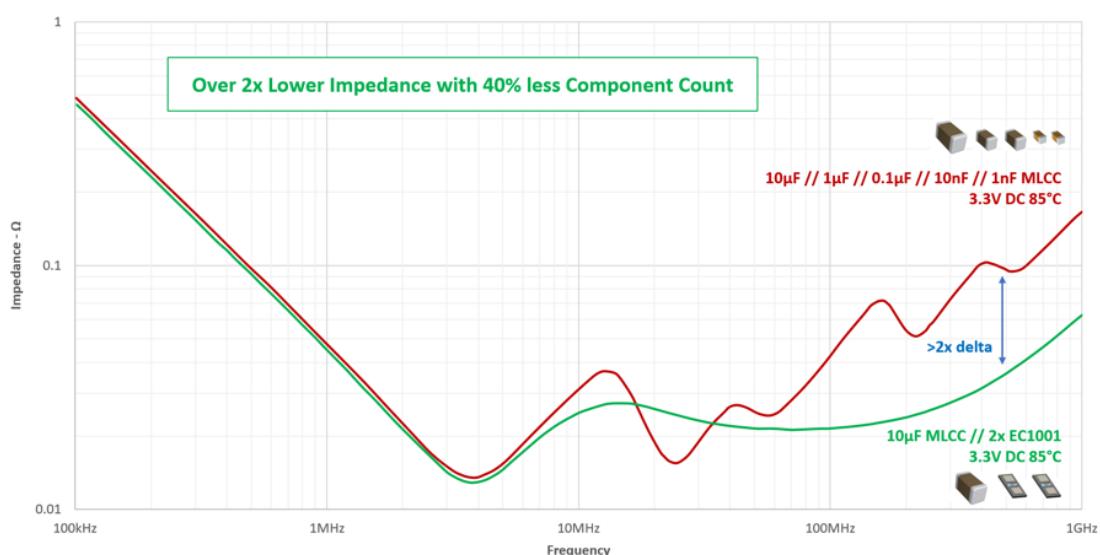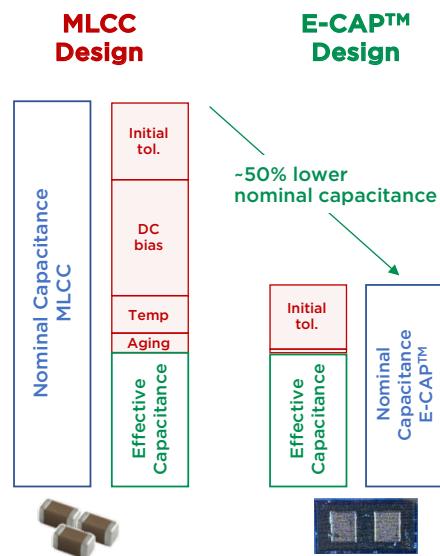


Characteristics of local de-coupling of MLCC combo vs E-CAP™

Integration for Improved Performance

Empower's IVR™ and E-CAP™ solutions thinness allow for components to be placed as close as possible to the load. Shortening the distance between the decoupling capacitors or the power converter to the active load improves performance and reliability.

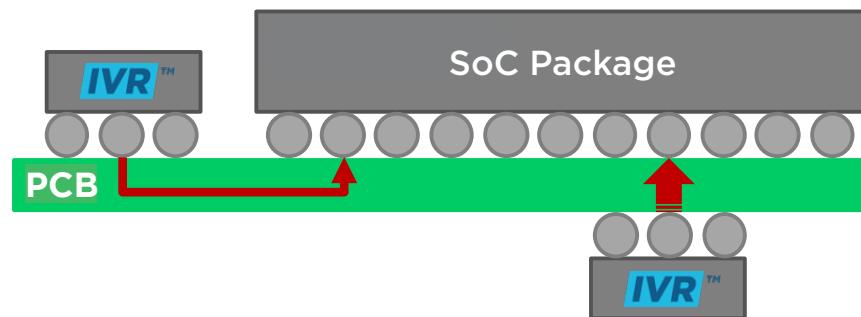

IVR™ can be mounted on back side of PCB to deliver low loss efficient vertical current to the SoC

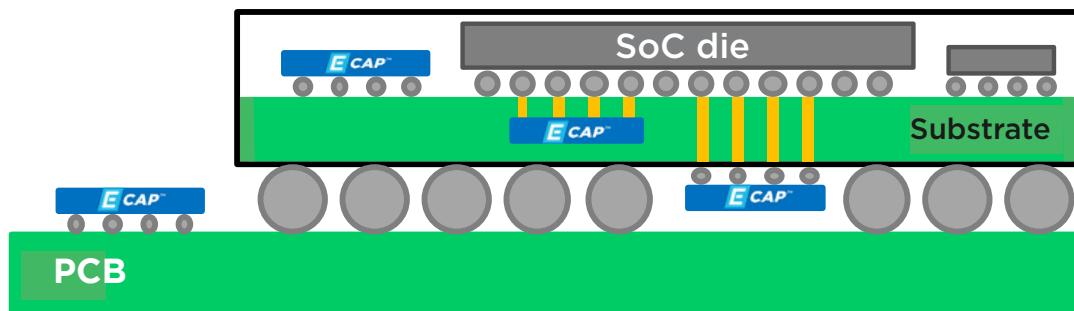

E-CAP™ can be mounted in-package for best-in-class bypass and filtering

Empower Product Families

IVR™ and Power Converters

Part Number	Outputs	Output 1	Output 2	Output 3	Output 4	VIN	Package Size (mm²)	Solution Size (mm²)	Type
EP7112	1	12A	-	-	-	3.3V	5 x 7	35	IVR
EP7122	2	9A	3A	-	-				
EP7123		6A	6A	-	-				
EP7139	3	9A	1.5A	1.5A	-	1.8V	5 x 5	25	IVR
EP7136		6A	3A	3A	-				
EP7133		3A	3A	3A	-				
EP7148	4	7.5A	1.5A	1.5A	1.5A				
EP7144		4.5A	4.5A	1.5A	1.5A				
EP7145		4.5A	3A	3A	1.5A				
EP7143		3A	3A	3A	3A				
EP7142		1.5A	1.5A	1.5A	1.5A				
EP7010	1	10A	-	-	-	1.8V	5 x 5	25	IVR
EP7015		5A	-	-	-				
EP7027	2	8A	2A	-	-				
EP7028		6A	4A	-	-				
EP7029		5A	5A	-	-				
EP7024		3A	3A	-	-				
EP7037	3	6A	2A	2A	-				
EP7038		4A	4A	2A	-				
EP7032		2A	2A	2A	-				

E-CAP™

Part Number	# Capacitors	Capacitance	Operating Voltage	Package Size (mm²)	Package Thickness (mm)
EC1001P	1	220nF	4.0V	1.0 x 0.5 (0402)	0.150
EC2012	2	2x 1.2nF	4.0V	0.5 x 0.25	0.100
EC1100P	5	3x 110nF 1x 145nF 1x 200nF	4.0V	2.5 x 0.6	0.150
EC2047B	17	1x 600nF 11x 200nF 5x 400nF	2.0V	2.3 x 1.9	0.200

Empower's E-CAP™ technology can be customized to fit specific design requirements: capacitance, form factor, pitch, configuration, etc. Contact us for more information.



SEMICONDUCTOR

USA/Global HQ

2700 Zanker Rd,
Suite 168
San Jose, CA 95134
USA

T: +1 408 957 8750



SEMICONDUCTOR

China and Asia Pacific

Room 511,
Yishang Creative Technology
Building No.22,
Jia'an South Road,
Bao'an District, Shenzhen,
China

T: +86 021-6157 7516



SEMICONDUCTOR

Europe

Via Tiziano, 32
20145 Milano (MI)
Italy

T: +39 02 00694638



Distributors



BoBhonestar



科宇盛达
KEYSIDA

世强
硬创
世强硬创电商
www.sekorm.com



M
MOUSER
ELECTRONICS

www.empowersemi.com